

■ ENG



Massivsauna **ALASKA CORNER INFRA+**
206 x 206 x 204 cm

Log board sauna ALASKA CORNER INFRA+

Assembly instructions

ENG

Massivsauna ALASKA CORNER INFRA+

- Dimension of the cabin: 206 x 206 x 204 cm
- Inside dimension: 196 x 196 x 198cm
- Wall thickness: 40 mm



Dear customer,

Before starting to assemble the cabin, please check with the help of the parts list, if all elements have actually been supplied. If, in the unlikely event, any elements are missing inform your dealer up to 14 days after receipt of the cabin.

Please keep the delivery note, the bill and the assembly instructions carefully in case of later queries.

You need the following tools:

- 1 hammer and a wood block or a rubber mallet
- 1 cordless screwdriver with bits for phillips or torx
- 1 tape measure
- 1 drill Ø10mm; 1 drill Ø3mm
- 1 spirit level
- 1 pencil

We recommend an assistant for the assembling of the cabin. Furthermore we recommend to drill the holes before.

- ! The electrical connection may only be performed by a qualified electrician or similiary qualified person.

Minor variations in dimensions are possible.
Subject to technical modifications and misprints.

Parts list ALASKA CORNER INFRA+

- 2 Floor frames 204 x 9 x 4 cm
- 1 Floor frame 138 x 9 x 4 cm
- 1 Floor frame 61,2 x 9 x 4 cm
- 8 Side walls A/B 193 x 48 x 4 cm (1 with ventilation gap; 2 with cutout for IR-radiator)
- 3 Side walls A/A 193 x 44 x 4 cm (1 for electricity)
- 1 Side wall A/A 193 x 55,2 x 4 cm
- 1 Elemente above door 69,3 x 10,1 x 4 cm
- 1 Elemente above fixed glass 72,3 x 8,6 x 4 cm
- 1 Steyer for glass element with groove 202 x 4,5 x 4 cm
- 2 Corner battens left and right at the door 202 x 7,8 x 6 cm
- 3 Corner battens 90° 193 x 6 x 6 cm
- 1 Roof support slat 197 x 4 x 4 cm
- 1 Roof support slat 193 x 4 x 4 cm
- 2 Roof support slat 141,6 x 4 x 4 cm; 1 x 45°
- 1 Roof support slat 89,7 x 4 x 4 cm; 2 x 45°
- 2 Roof element 194 x 48 x 4 cm
- 1 Roof element 194 x 49 x 4 cm
- 1 Roof element 186 x 49 x 4 cm, bevelled
- 1 Covering battens for roof element 196 x 1,2 x 4 cm
- 1 Covering battens for roof element 192 x 1,2 x 4 cm
- 2 Covering battens for roof elements 141,2 x 1,2 x 4 cm; 1 x 22,5°
- 1 Border edging batten 83,2 x 1,2 x 4 cm; 2 x 22,5°
- 2 Border edging battens 149,8 x 6 x 4 cm; 1 x 22,5°
- 1 Border edging batten 86,5 x 6 x 4 cm; 1 x 22,5°
- 2 Back rests 101 x 26 x 5 cm
- 2 Back rests 53 x 26 x 5 cm
- 1 Bench 195 x 62 x 10 cm
- 1 Adjustable bench 195 x 62 x 10 cm
- 1 Bench 133,5 x 62 x 10 cm
- 2 Head rests 43 x 25 x 7 cm
- 1 Benchcovering at fixed glass 72 x 14 x 2 cm
- 2 Covers for IR-radiators 88 x 21 x 5 cm
- 1 Bench supporting battens 142,3 x 4 x 4 cm; 1 x 45°
- 1 Bench supporting battens 120 x 4 x 4 cm
- 2 Bench supporting battens 55 x 4 x 4 cm
- 1 Bench supporting battens 60 x 4 x 4 cm
- 1 Heater protective grille 57 x 45 x 2 cm.
- 2 Heater protective grille 45 x 45 x 2 cm.
- 1 Bench covering 195 x 35 x 4 cm
- 2 Bench supporting battens for bench covering 26 x 4 x 4 cm
- 1 Glass door 191,5 x 68,1 x 0,8 cm
- 1 Set of hinge plates
- 1 Glasselement 194,5 x 75,5 x 0,8 cm
- 1 Alu U-profil 72,3 cm
- 1 Floor grating 70 x 53 cm
- 1 Inside lamp
- 1 Lamp facing 38 x 32 x 4 cm
- 1 Ventilation gate
- 1 Silikoncabel 3 lfm 5 x 1,5 mm²
- 1 Wooden batten 200 x 2,7 x 1,2 cm
- 2 Infrared radiators 500 Watt
- 1 Assembly material set
- 1 Assembly instructions

Assembly instructions

ENG



Screws: 4 x 70 mm
Drill it before



Screws: 6 x 120 mm



fig 1.4



fig 1.5



fig 1.6

Screws: 6 x 120 mm

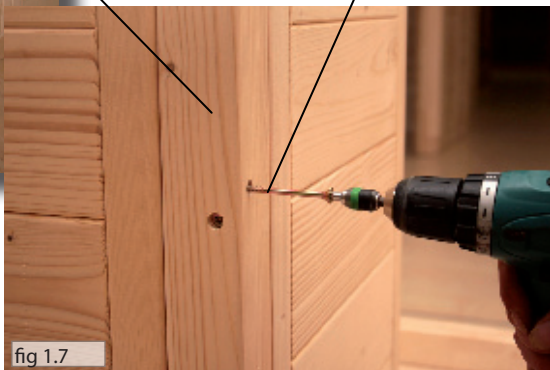


fig 1.7



fig 1.8



fig 1.9

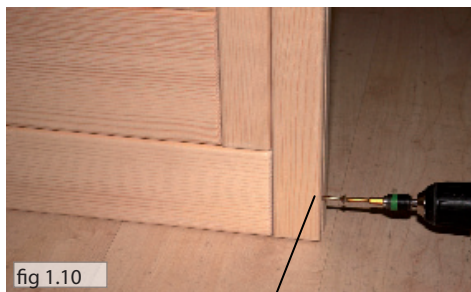


fig 1.10

Screws: 4 x 70 mm

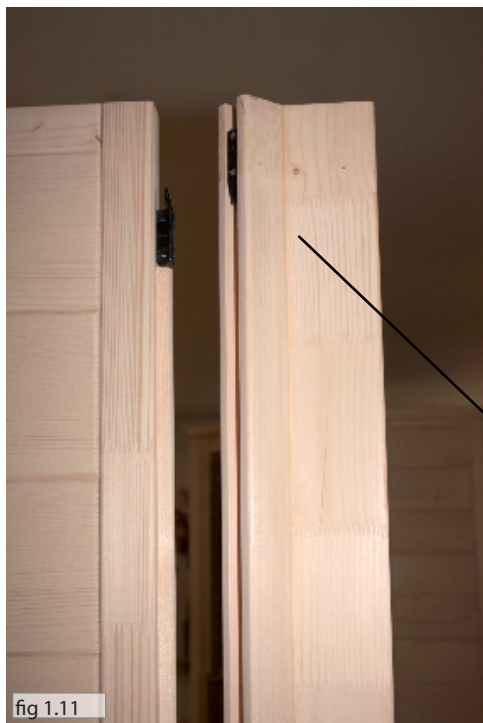


fig 1.11



fig 1.12



fig 1.13



Abb 1.14

Attach the U-profile to the glass plate.
Glue the U-profiles with silicone to the floor



fig 1.15

Screws: 4 x 70 mm

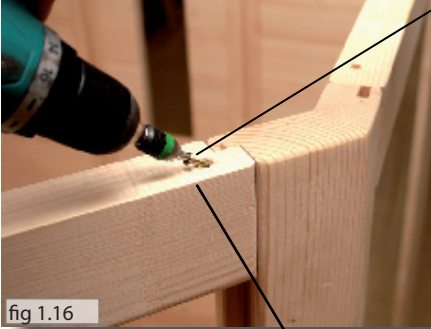


fig 1.16

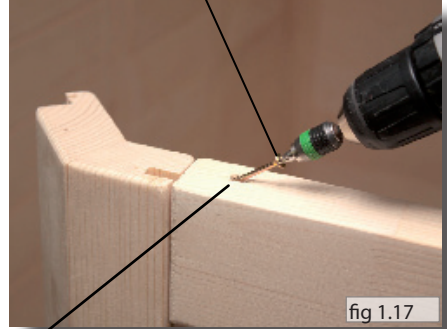


fig 1.17



fig 1.18

Covering for the screw hole



Abb 1.19

Screws: 4 x 70 mm

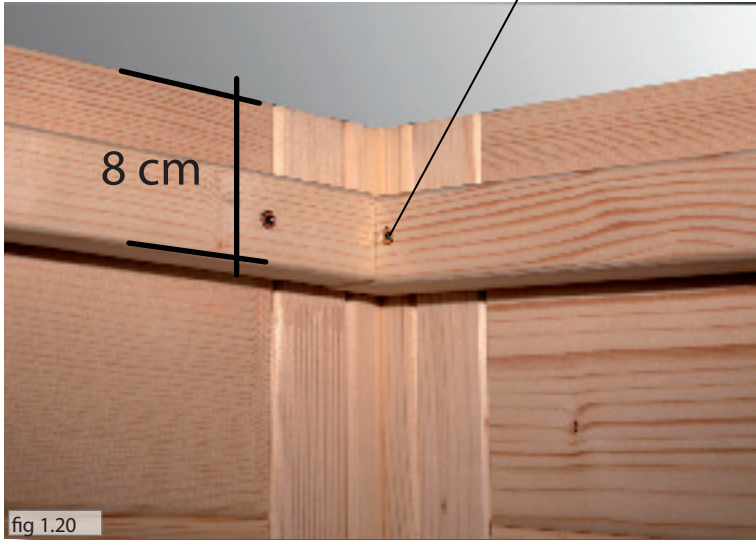


fig 1.20

Screws:
4 pcs. 3 x 40 mm



fig 1.21

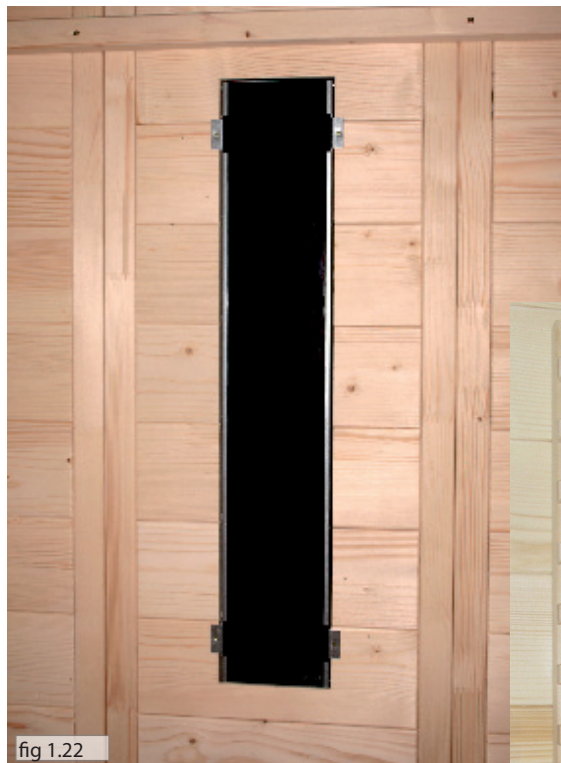


fig 1.22

Screws:
4 pcs. 4 x 60 mm


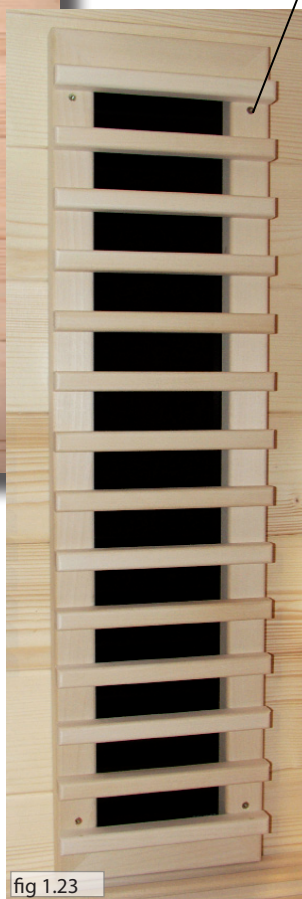


fig 1.23

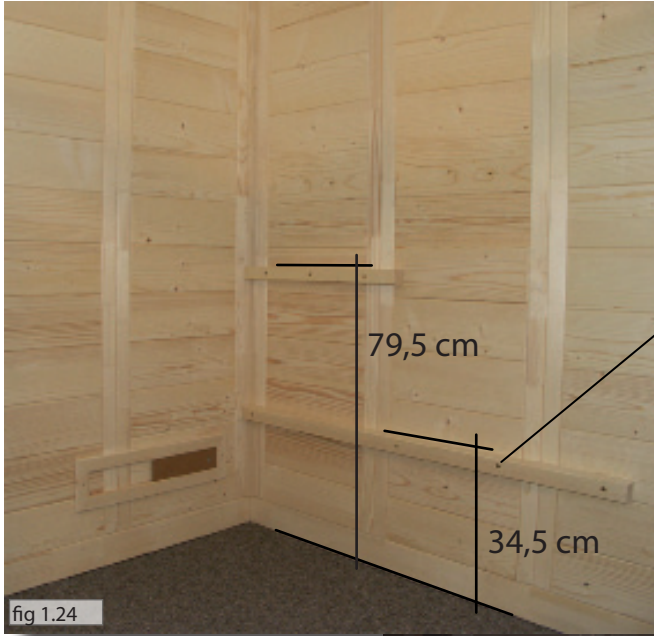

Screws: 5 x 70 mm

79,5 cm

34,5 cm



fig 1.24



Screws:
3,5 x 50 mm
(Screw bench covering
from the inside)

fig 1.25

Screws: 3 x 40 mm

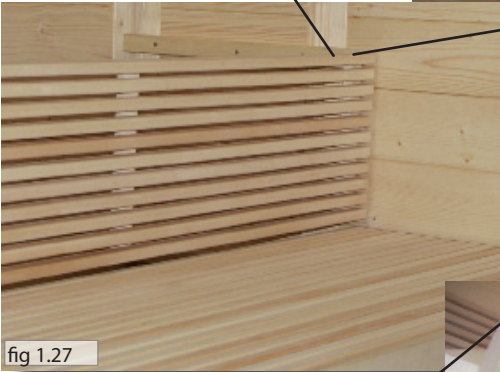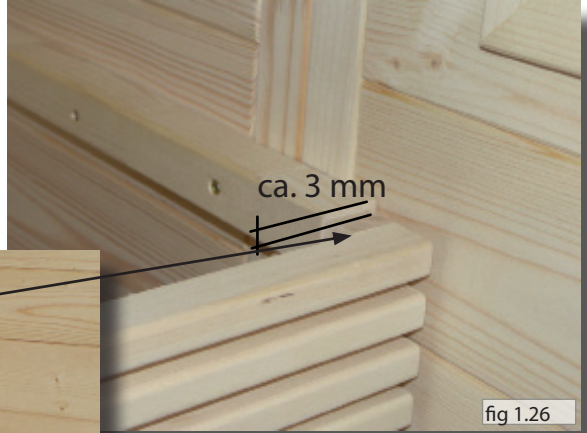

3 Stk.Screws: 5 x 70 mm



Screw the cross bench -
outside view

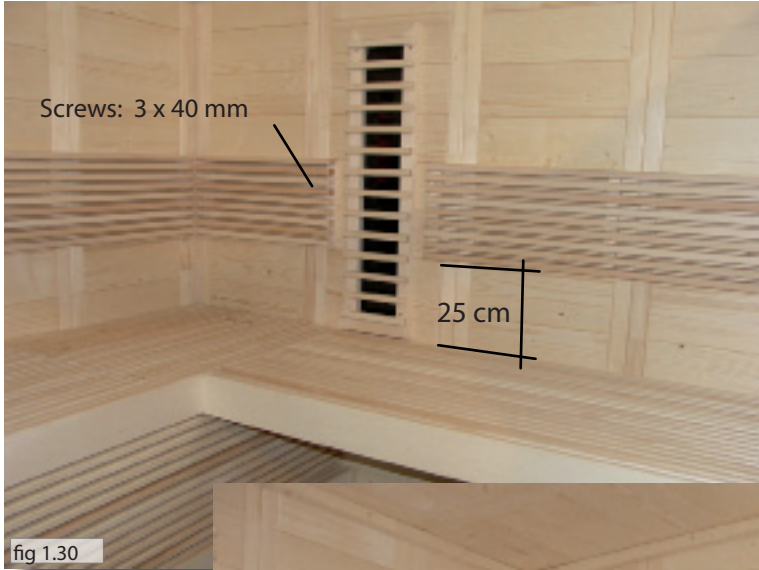




fig 1.32

Heater protective
grill -
inside view

Screws: 3 x 40 mm

4 pcs. Screws: 3 x 40 mm



fig 1.33



fig 1.34




fig 1.35



fig 1.36




fig 1.37

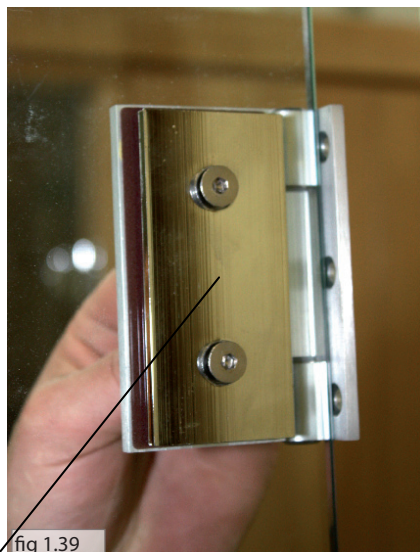

Inner door glass



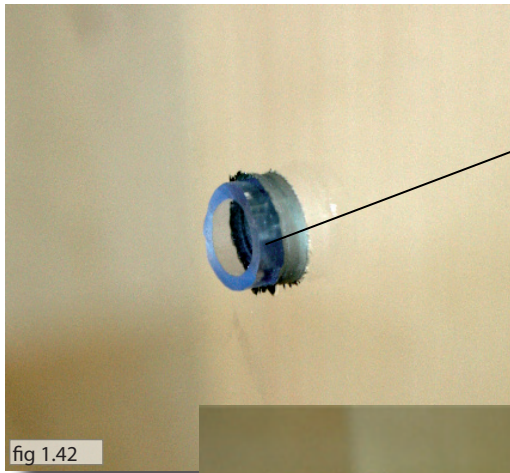

First the two silicone inserts plug in hole at glass door.

fig 1.42



fig 1.43

Handle exterior

Handle inside

Assembly instructions

ENG



fig 1.44



fig 1.45

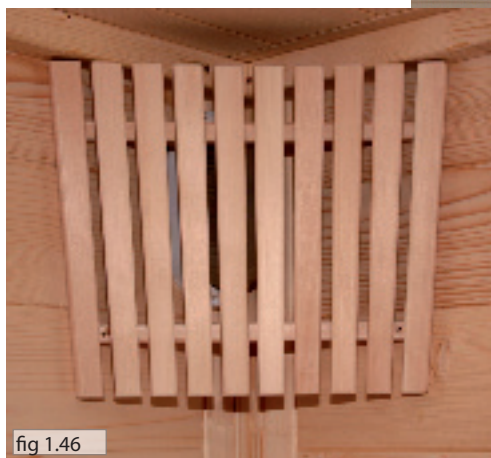


fig 1.46

Start with the frontal border edge above the door




fig 1.47

Screws: 3 x 40 mm



fig 1.48

PLAN ALASKA CORNER INFRA+ 206 x 206 x 204 cm

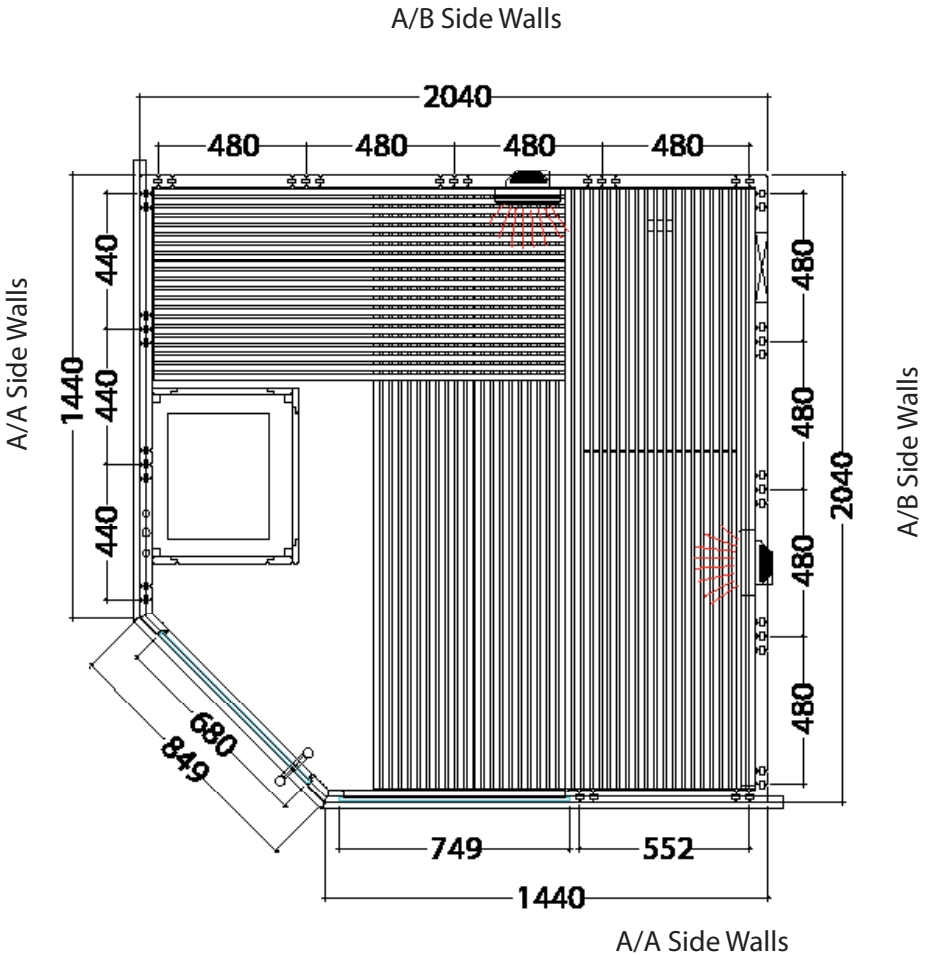

Assembly of the electricity side wall on the left or on the right side



Log board sauna ALASKA CORNER INFRA+